
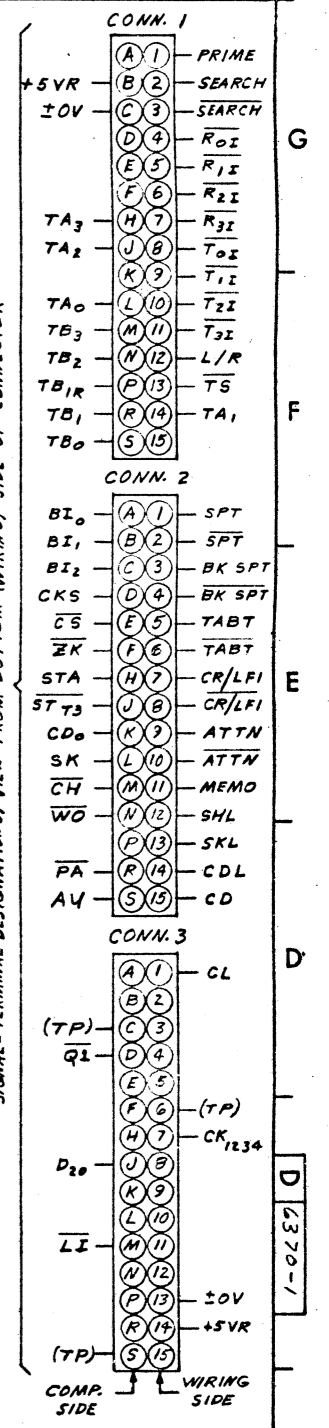


LOCATION	TYPE	WL. PART No.	TERM. No. ±0V	TERM. No. V <sub>CC</sub> +5VR	QTY
L1, 2, 6, 14, 16	9930	376-0022	7	14	5
L3, 4, 12, 23	9946	376-0023	7	14	4
L5, 13, 22	SN7473N	376-0005	11	4	3
L7	9963	376-0053	7	14	1
L8, 11, 15, 19, 24, 27	9936	376-0026	7	14	7
L9	SN7404N	376-0010	7	14	1
L10	SN7494N	376-0084	12	8	1
L18, 26	9935	376-0025	7	14	2
L21	SN7406N	376-0055	7	14	1
L24, 25	SN74123N	376-0080	8	16	2

COMPONENT	SIZE/TYPE	WL. PART No.	QTY
R1, 2, 9, 10, 11, 13, 17, 23, 33, 41, 42, 43, 44, 45, 46, 47, 48, 49	10K 1/4W	330-4010	19
R3	15K 5/8W	330-4019	1
R4	22K 5/8W	330-4023	1
R5, 16, 24, 34, 37	39K 1/4W	330-3032	5
R6, 19, 25, 35, 38	47K 1/4W	330-1049	5
R7, 20, 26, 36, 39	47K 1/4W	330-3047	5
R12	97K 5/8W	330-4045	1
R14	39K 5/8W	330-4034	1
R15, 16, 21, 22, 27, 50	1K 1/4W	330-3010	6
R28, 29, 30, 31, 32, 40	2.2K 1/4W	330-3022	6
C1	47PF CER	300-1047	1
C2	3.3MF TANT	300-4016	1
C3, 16, 17, 18, 19, 25, 50	560PF CER	300-1560	7
C4, 12	.01MF CER	300-1903	2
C5, 6, 7, 9, 13, 14, 15, 24, 28, 29, 37, 38, 39, 41, 42, 43, 44, 45, 46, 47, 48	470PF CER	300-1470	19
C10	5.6MF TANT	300-4017	1
C11, 21, 23, 26	820PF CER	300-1820	4
C35, 49	10MF 16V	300-3006	2
C36, 37, 38, 39, 41, 42, 43, 44, 45, 46, 47, 48	.05MF CER	300-1900	13
D1	DIODE GER.	300-0000	1
D2, 3, 4, 5, 6, 7, 8, 9, 10	DIODE SIL	300-1001	9

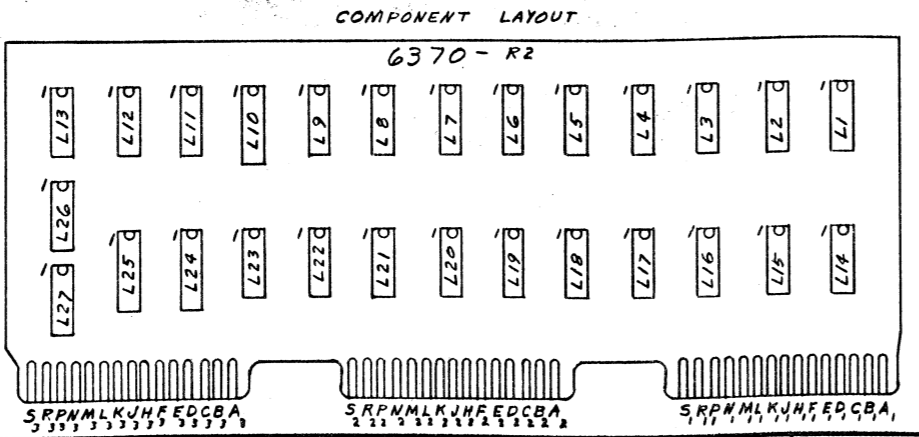

NOTE:-  
 1. REMOVE JUMPER FOR 1/2 INDEXING  
 2. ADD JUMPER FOR 1/2 INDEXING

WANG LABORATORIES INC.			
TEWKSBURY, MASS.			
MODEL NO. 1200	DRAWN 7-30-73	APP. 8-1-73	8-1-73
CHECKED	APP.		
TITLE SCHEMATIC, LOGIBLOC 6370			
TYPEWRITER INPUT			
SHT OF	DWG. NO. D 6370-1	REV. 1	

REVISION	DATE	BY
1	REVISED PER ECR 3851 APP. D	