



HOLE LEGEND

DRILLED OR PUNCHED HOLE	HOLE DIA.	TOL.
DRILLED	.015 to .125	±.001
PUNCHED	.125 to .300	±.002
TOLERANCES	.311 to .500	±.003
	.511 to .500	±.004

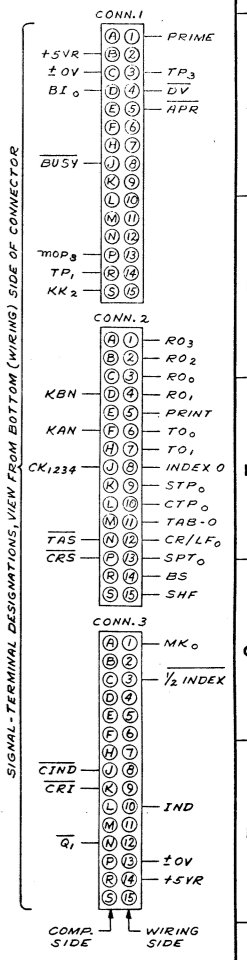

I.C. LOCATION	TYPE	W.L. NO.	TERM FOR ±OV	TERM FOR VCC +SVR	QTY.
L1,4,9,14,15,18,19,33,34,44	SN7400N	376-0002	7	14	10
L2	F9930	376-0022	7	14	1
L3	F9936	376-0026	7	14	1
L5,26	SN7410N	376-0003	7	14	2
L6,8	SN74197N	376-0083	7	14	2
L7	F9944	376-0024	7	14	1
L10,11,13,37,38	SN7402N	376-0016	7	14	5
L12,27,39,40,41	SN7490N	376-0073	10	5	5
L16,20,25,42	SN7404N	376-0010	7	14	4
L17	F9602	376-0104	8	16	1
L21,22	SN7495N	376-0059	7	14	2
L23,24,30,31	SN7442N	376-0008	8	16	4
L28	F9935	376-0025	7	14	1
L29	F9946	376-0023	7	14	1
L32	SN7473N	376-0005	11	4	1
L35,36	SN7409N	376-0085	7	14	2
L43	F9963	376-0033	7	14	1

NOTE:
1. REMOVE JUMPER FOR 1/2 INDEXING IN ZONE U-14.

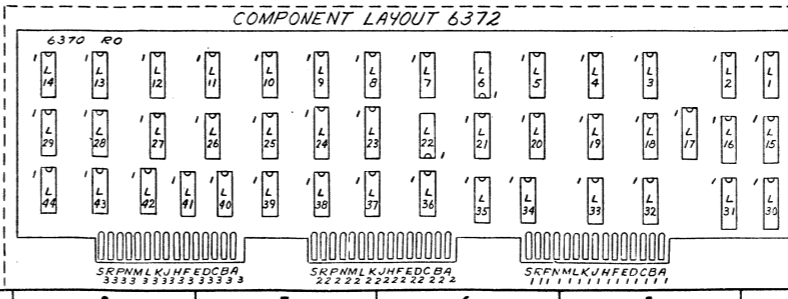

COMPONENT	SIZE, TYPE	W.L. NO.	QTY.
R1,3	1K 1/4W	330-3010	2
R2,5,9,10,11	10K 1/4W	330-4010	5
R4,12	2.2K 1/4W	330-3022	2
R6	12K 1/4W	330-4012	1
R7	10K POT.	336-1010	1
R8	15K 1/4W 5%	330-4016	1
C1	560µF CER.	300-1560	1
C2,5	.0033µF 100V	300-2033	2
C3	2.2µF 20V TA.	300-4014	1
C4	5.6µF 35V TA.	300-4017	1
C6,7,8,9,10,11,12,13,14,15	.02µF 25V	300-1904	10
C16,17	15µF 20V	300-4022	2
D1,2,3,4	30V SIL.	380-1001	4

WANG PART NO.	ITEM	QTY.	NAME	MATERIAL	DESCRIPTION
1200	LABORATORIES INC.				
1200	TELETYPEWRITER CONTROL				

REV.	DATE	BY	DESCRIPTION
1			